


SERIES 16 | MECHANICAL SLIP CLUTCHES

OUR MOST COMPACT MODEL FEATURES BIG TORQUE IN A SMALL PACKAGE


See pages 198-199 for slip clutch operation (construction, installation, capacity) and mounting options.




ADJUSTABLE

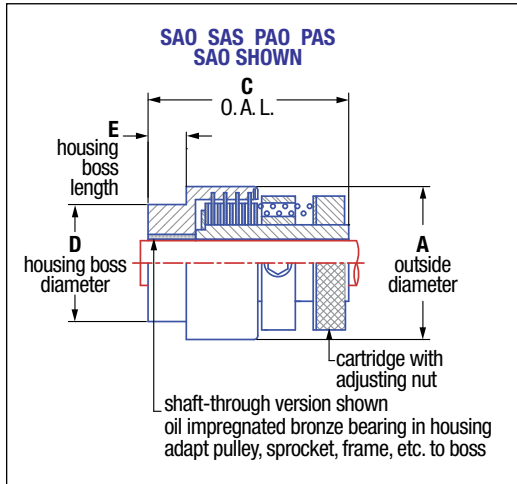

FIXED FACTORY SET – NON ADJUSTABLE

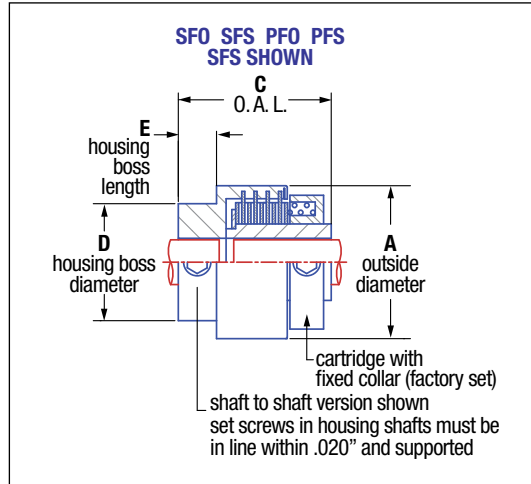


END VIEW TYPICAL

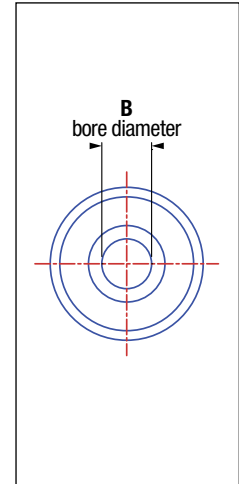

MODEL NO.	A inches (mm)	B STD.	B MAX.	C inches (mm)	D inches (mm)	E inches (mm)	CAPACITY @ 50 RPM		FRICTION SURFACES
		inches (mm)	inches (mm)				lb-in (Nm)	Watts	
SFS 16 & SFO 16	1.00 (25.4)	.250 (8)	.375 (9)	1.00 (25.40)	.760 (19.30)	.25 (6.35)	10 (1.2)	6	8
SAS 16 & SAO 16	1.00 (25.4)	.250 (8)	.375 (9)	1.31 (33.27)	.760 (19.30)	.25 (6.35)	10 (1.2)	6	8
PFS 16 & PFO 16	1.00 (25.4)	.250 (8)	.375 (9)	.78 (19.81)	.760 (19.30)	.25 (6.35)	2 (.3)	1	2
PAS 16 & PAO 16	1.00 (25.4)	.250 (8)	.375 (9)	1.06 (26.92)	.760 (19.30)	.25 (6.35)	2 (.3)	1	2

PART NUMBER EXAMPLE

See page 200 for part number identification.

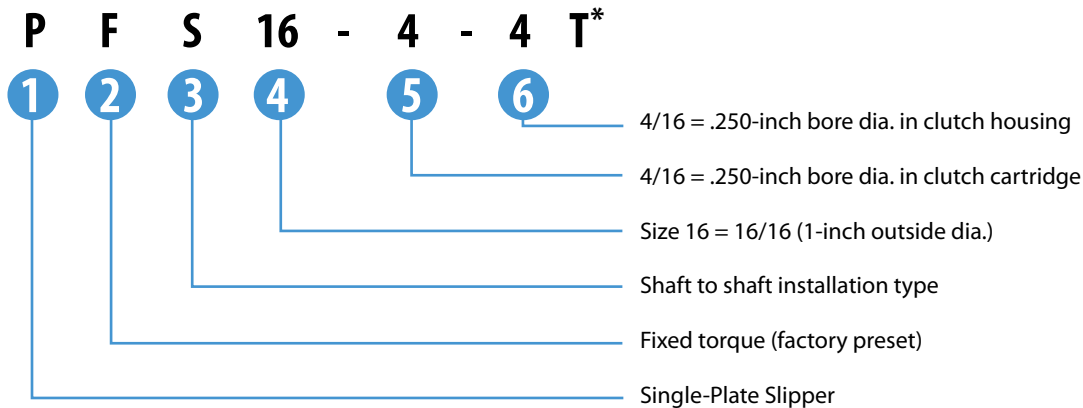

*T = Preset Torque Value, customer-specified

QUOTE REQUEST FORMS: SEE PAGE 23.